


## Kunststoffspritzguß in PEHD, PA6 und PU Getreide - leichte Produkte - zerbrechliche Produkte

PLASTIC MATERIAL INJECTED HDPE/PA6/PU

Cereals - Light materials - Fragiles materials


flache Scheiben/Flat washers

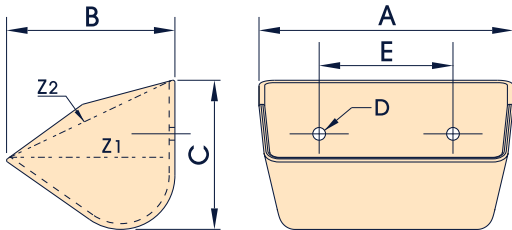

Art.	A mm	B mm	C mm	Lochung/Holes			Inhalt/Capacity		Becher / Buckets /m	Gewicht/Weight kg		
				Nr.	D mm	E mm	Z <sub>2</sub> (°)	Z <sub>1</sub> (°)		PEHD	PA 6	PU
SPB 15-125	155	125	120	2	8,5	70	1,00	0,58	7	0,24	0,27	0,29
SPB 18-125	180	125	120	2	8,5	100	1,25	0,70	7	0,29	0,33	0,35
SPB 20-135	200	135	130	2	8,5	100	1,69	1,04	6	0,32	0,36	0,38
SPB 22-160	220	160	160	2	8,5	100	2,65	1,70	5,25	0,50	0,57	0,60
SPB 24-160	240	160	160	2	8,5	120	2,92	1,88	5,25	0,54	0,62	0,64
SPB 26-160	260	160	160	3	8,5	80	3,19	2,05	5,25	0,57	0,65	0,68
SPB 28-160	280	160	160	3	8,5	80	3,46	2,20	5,25	0,60	0,68	0,71
SPB 30-190	300	190	190	3	8,5	100	5,15	3,34	4,50	0,95	1,08	1,13
SPB 35-190	350	190	190	3	8,5	135	6,08	3,95	4,50	1,10	1,25	1,31
SPB 40-210	400	210	210	3	8,5	135	9,13	6,16	4	1,32	1,50	1,57

mit gewölbten Becherschrauben verwenden (siehe Seite 17)/Use countersunk lug bolt (see page 17)

## BOLJET®

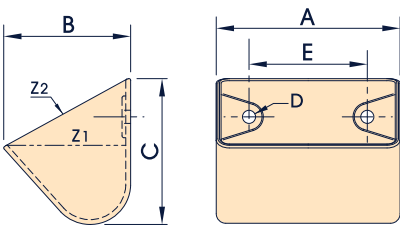

Art.	A mm	B mm	C mm	Lochung/Holes			Inhalt/Capacity		Becher / Buckets /m	Gewicht/Weight kg		
				Nr.	D mm	E mm	Z <sub>2</sub> (°)	Z <sub>1</sub> (°)		PEHD	PA 6	PU
B 10-080	100	81	95	2	8,5	50	0,25	0,15	8	0,05	0,06	0,06
B 12-090	120	90	105	2	8,5	50	0,35	0,20	7,50	0,07	0,08	0,09

mit gewölbten Becherschrauben verwenden (siehe Seite 17)/Use countersunk lug bolt (see page 17)

